



Smart Sensing Solutions Since 1954



UVS Analog



MEP45



X-PRO XP10



Label Eye

P.O. BOX 25135 • TAMPA, FL 33622-5135
813-886-4000 • 800-237-0946
FAX: 813-884-8818 • 800-375-8861
ttco.com • info@ttco.com

004-0151



Smart Sensing Solutions Since 1954



SMARTEYE[®]
X-MARK[™]

ttco.com
800-237-0946 • 813-886-4000



Photoelectric Registration Sensor

The **SMARTEYE® X-MARK™** is the fastest, most accurate registration mark sensor available on the market. The **X-MARK™** was designed to target the printing, packaging, and converting markets. By creating a specific sensor to exceed the current capability of the market leaders, and at a price that removes all barriers to change, the **X-MARK™** is sure to attract the attention of engineers and purchasing agents alike.

The **SMARTEYE® X-MARK™** uses a 2.2mm light spot that can detect a mark, edge, or product as it approaches the sensor in any direction. Some competitive models use a line to give the impression of accuracy, but through specific testing, we've discovered that these very expensive sensors are not as accurate as they appear. The **X-MARK™** sensors' 5µs repeatability provides reassurance of accuracy at the highest speeds in any direction. The only question is... "How fast can the machine run?"

The sensor was designed as a drop-in replacement to the existing market leaders. The bracket system provides the customer with a hole-for-hole configuration that aligns the focal point in the exact position of similar sensors currently on the market. Having this unique ability to be a drop-in replacement ensures the customer's requirements are met and exceeded without additional mechanical, electrical, or performance considerations.

Using the **X-MARK™**, High Speed Photoelectric Registration Sensor from Tri-Tronics® removes performance limitations and allows for full throughput capacity at the highest speeds in any direction.



Features

- 10µs Response Time
- 5µs Repeatability
- Four AUTOSET Modes
 - Light State
 - Dark State
 - Two-Point
 - Dynamic
- PLC and External Programming Through the Remote AUTOSET Line
- Connector or Cabled Version
- Full Spectrum, White LED
- Patent No. 5,621,205
- AUTOSET – One-Touch Setup
- 8-LED Dual-Function Bar Graph

Benefits

- Increase Edge Accuracy at the Highest Speeds
- Virtually Eliminate Setup Time
- Reduce Material Waste
- Eliminate Compensation Software
- Increase Throughput Capacity
- Eliminate Machine Speed Constraint
- Quick Digital Changeover
- Drop-in Replacement of Existing Sensors

Specifications

SUPPLY VOLTAGE

- 10 to 30 VDC
- Polarity Protected
- Intended for use in Class 2 circuits

CURRENT REQUIREMENTS

- 30mA (exclusive of load)

OUTPUT TRANSISTORS

- (1) NPN and/or (1) PNP output transistor.
Note: Dependent on Model; see "How to Specify, #3".
- Outputs sink or source up to 150mA (current limit)
- All outputs are continuously short circuit protected

REMOTE AUTOSET INPUT

- XM/XMC-1 & 2 Models – Momentary sinking input (1mA)
- XM/XMC-3 Models – Momentary sourcing input (1mA)
Note: Remote programming available in XM/XMC-1 Models only.

REMOTE LT/DK INPUT

- XM/XMC-2 Model – Connect to Negative/0VDC
- XM/XMC-3 Model – Connect to Positive/10-30VDC

RESPONSE TIME

- 10µs

REPEATABILITY

- 5µs

LED LIGHT SOURCE

- White = Broadband Color Spectrum

DIAGNOSTIC INDICATORS

- Contrast Indicator – Display scaled reading of sensor's response to contrasting light levels (light vs. dark) on an 8 bar LED display
Note: All 8 LEDs will flash three times if contrast insufficient or too low in Two-Point AUTOSET mode.

- Red LED Output Indicator – Illuminates when the sensor's output transistors are "ON"
Note: If Output LED flashes, a short circuit condition exists.
- Green LED Timer Indicator – Illuminates when the 10ms pulse stretch timer is enabled
- Red LED INVERT Indicator – Illuminates when INVERT is enabled

PUSHBUTTON CONTROL

- AUTOSET
- INVERT outputs
- Manual Adjustments
- Timer – 10ms Pulse Stretcher

HYSTERESIS

- Dynamic – adjusted by AUTOSET

LIGHT IMMUNITY

- Responds to sensor's pulsed modulated light source – immune to most ambient light including indirect sunlight

AMBIENT TEMPERATURE

- 10°C to 60°C (50°F to 140°F)

RUGGED CONSTRUCTION


- Chemical resistant, high impact polycarbonate housing
- Waterproof ratings: NEMA 4X, 6P and IP67
- Conforms to heavy industry grade CE requirements



RoHS Compliant
Product subject to change without notice.

Connections and Dimensions

SMARTEYE® X-MARK™

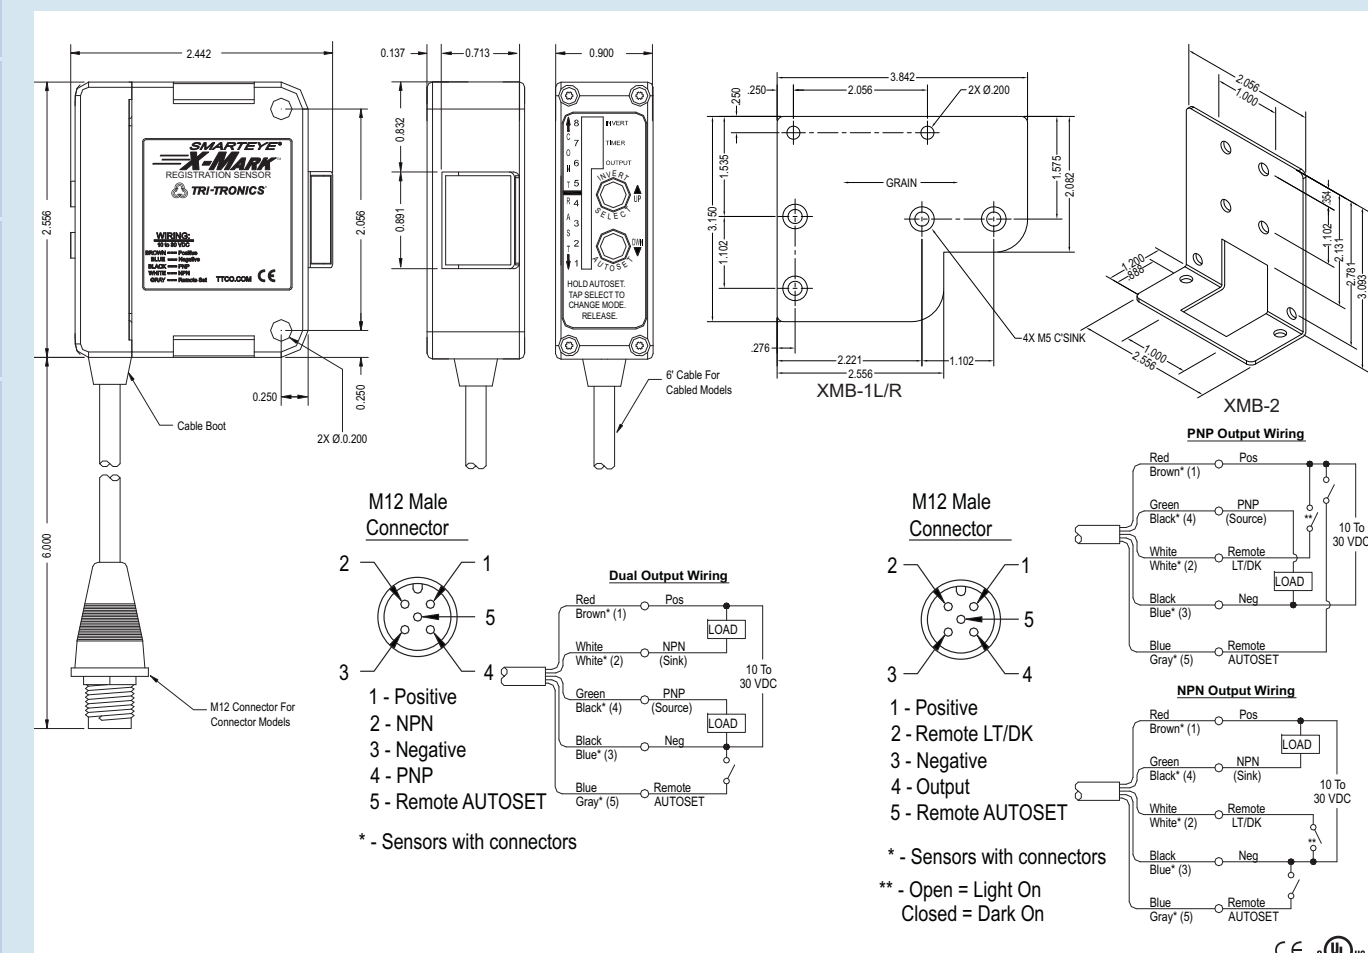

How to Specify

- 1. Select Sensor:**
SMART EYE® X-MARK™
Registration Sensor
- 2. Select Cable:**
Blank = 6' Cable
C = M12 Pigtail Connector

- 3. Select Output Configuration:**
-1 = NPN/PNP
-2 = NPN w/ Remote LT/DK
-3 = PNP w/ Remote LT/DK
- 4. Select Lens Material:**
Blank = Glass
P = Acrylic


Example: XM C -1 P
SMART EYE® X-MARK™
Registration Sensor

Blank = 6' Cable
C = M12 Pigtail Connector

Output Configuration
-1 = NPN/PNP
-2 = NPN w/ Remote LT/DK
-3 = PNP w/ Remote LT/DK

Lens Material
Blank = Glass
P = Acrylic

Sensing Range

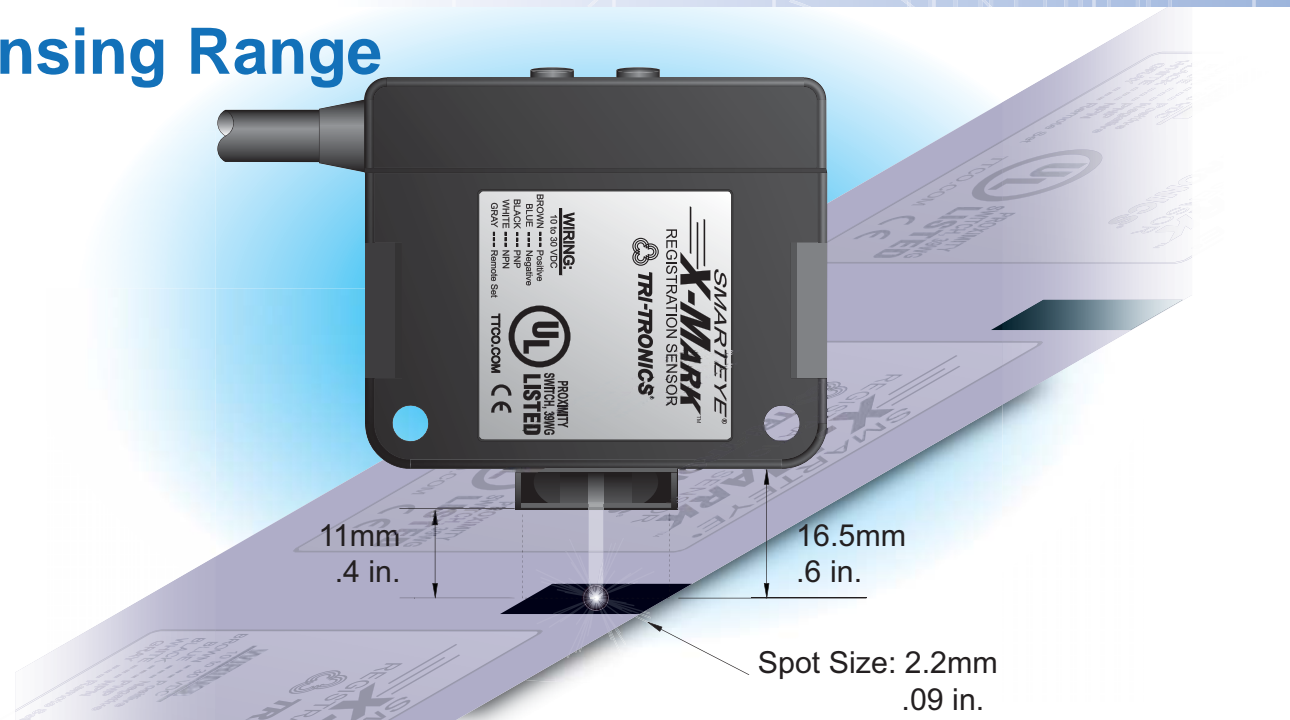


Hardware & Accessories

Micro Cable Selection Guide, 8-wire, M12


- GSEC-6**
6' (1.8 m) Shielded cable
- GSEC-15**
15' (4.6 m) Shielded cable
- GSEC-25**
25' (7.62 m) Shielded cable
- GRSEC-6**
6' (1.8 m) Right angle shielded cable
- GRSEC-15**
15' (4.6 m) Right angle shielded cable
- GRSEC-25**
25' (7.62 m) Right angle shielded cable
- GX-25**
25' (7.62 m) Extension cable

Mounting Brackets

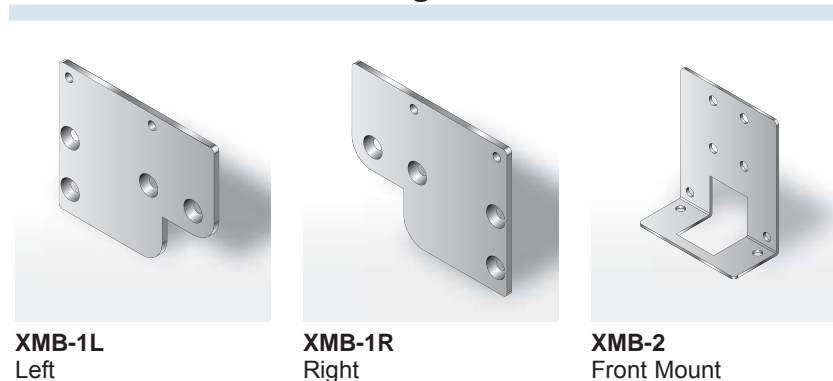

Applications

SMART EYE®
X-MARK™

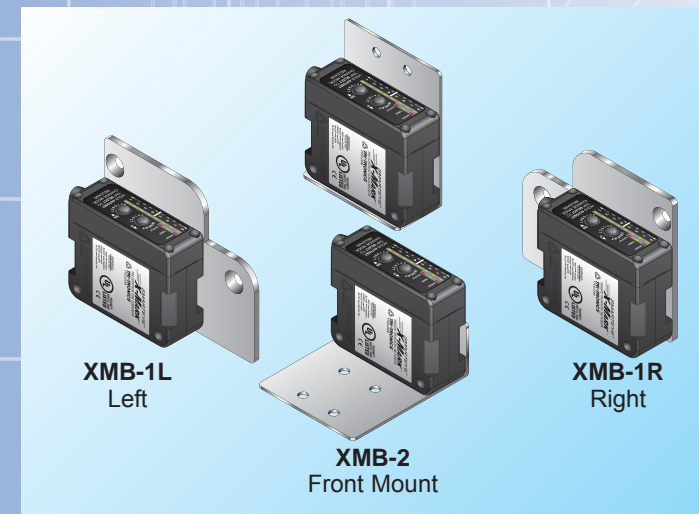


Many Bracket Configurations




Angle for Glare Issues

== X-TREME PRECISION!

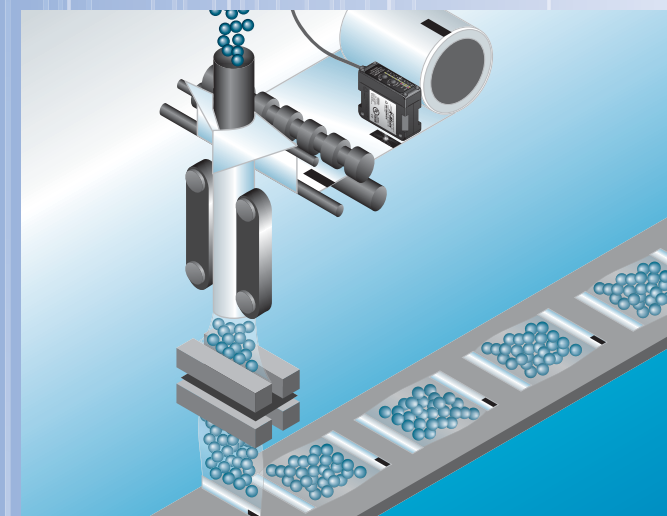

Form, Fill, & Seal

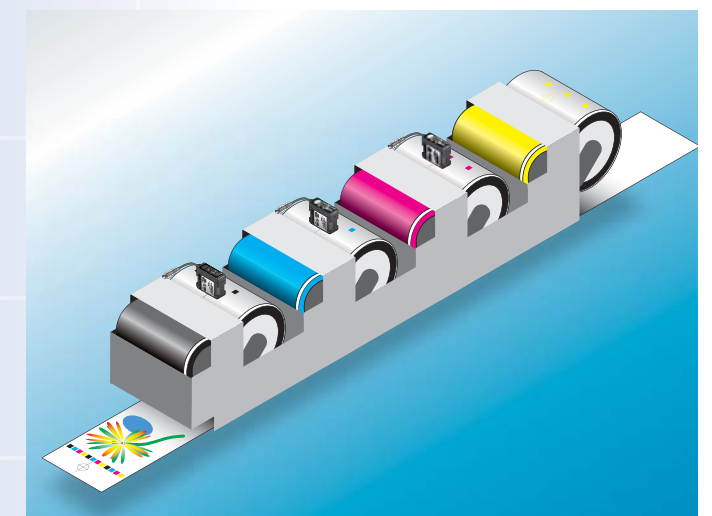

High Speed Offset Printing

Features

AGS™ AUTOMATIC GAIN SELECT

This unique feature provides automatic digital selection of amplifier gain based upon your sensing requirements.

AUTOSET ADJUSTMENT

The AUTOSET adjustment routine only requires the push of one button, one time! There are four AUTOSET Modes to choose from: Light State, Dark State, Two-Point, and Dynamic. Light State AUTOSET is used when there is a light background with a dark mark; Dark State AUTOSET is used when there is a dark background with a light mark; Two-Point AUTOSET is used when the background and mark are very similar in color or contrast; Dynamic AUTOSET is used when there is a requirement to jog the mark past the sensor on-the-fly, or when there isn't an opportunity to stop the system for setup.

REMOTE AUTOSET

Remotely AUTOSET the sensor by applying a contact closure from the

Remote AUTOSET input wire to negative (0VDC) or positive (10-30VDC), depending on model, as shown in the wiring diagram. The Remote AUTOSET command will duplicate the last manual AUTOSET performed.

EDR® (Patent No. 5,621,205)

Another unique feature is the digitally controlled EDR (Enhanced Dynamic Range) circuit. It prevents Dark State saturation and expands the operating range without reducing amplifier gain.

CONTRAST INDICATOR™

Provides "at-a-glance" performance data.

TIMER

When the "OFF" delay pulse stretcher is enabled, the output duration is extended by 10 milliseconds. Enabling the Timer allows ample time for the controller to respond. The time durations of the gap between marks must be longer than the selected delay.

HIGH SPEED

10µs response time when responding to Light or Dark State. 5µs repeatability.

CONNECTIONS

Built-in 5-pin M12 connector, or 6' Cable.

MOUNTING OPTIONS

Through-hole or Bracket Mount.

REMOTE PROGRAMMING (XM/XMC-1 Models Only)

Remotely program the sensor's four AUTOSET Modes, Change the Timer, Invert the output, make minor adjustments, and repeat the last AUTOSET performed by applying a contact closure to negative (0VDC) in a simple sequence of pulses. This can be accomplished using a PLC pulse train, an HMI, or a momentary pushbutton switch.

Special Features

REMOTE PROGRAMMING (XM/XMC-1 Models Only)


The Remote Programming feature of the SMARTEYE® X-MARK™ allows the customer to configure, AUTOSET, and tweak the sensor using a PLC pulse-train, HMI, NPN transistor output, or momentary pushbutton switch to 0VDC/ground. This provides the customer with control over every aspect of the sensor configuration without having to physically touch the sensor. If you have several sensors on your machine; have sensors buried deep within the mechanical structure of the machine; or have your sensors in safe areas behind interlocks... you can easily access these sensors remotely to perform a "digital changeover" due to this unique, special feature.



HMI - Human Machine Interface



Example: Invert Mode - Normal



Each pulse (L) is low for 40ms to 400ms. The idle time (H) between pulses is 40ms to 400ms. The delay (D) between sets of pulses is .75 seconds to 5 seconds.


Detailed Features

AUTOSET Procedure

SELECT AUTOSET MODE:

While holding down the AUTOSET button, tap the "SELECT" button to advance through the four modes. The direction of the LED's indicates the current AUTOSET mode illustrated below. When desired AUTOSET mode is selected, release the AUTOSET button. (See below INITIATE AUTOSET for details)

A. LIGHT STATE B. DARK STATE C. TWO-POINT** D. DYNAMIC**

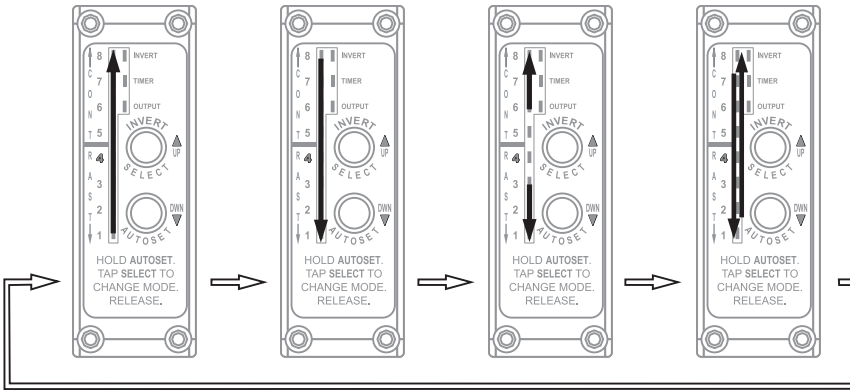

INITIATE AUTOSET: After selecting the required AUTOSET MODE...

A. LIGHT STATE AUTOSET MODE - Place the light background in view, press and release the AUTOSET button.

B. DARK STATE AUTOSET MODE - Place the dark background in view, press and release the AUTOSET.

C. TWO-POINT (Span Adjustment) - Place the background in view, press and release the AUTOSET button. Then place the mark in view, press and release the AUTOSET button.

D. DYNAMIC - With the background in view, press and hold the AUTOSET button move the mark in view, or past the sensor, then release the AUTOSET button.

INVERT: To invert the output, press and hold the INVERT button for 2 seconds.

TIMER: To select the 10ms pulse stretcher, press and hold both buttons.

REMOTE AUTOSET:

1. When using the Remote AUTOSET line, the AUTOSET mode must first be selected manually via the pushbuttons, see Select AUTOSET Mode.
2. To initiate a Remote AUTOSET, pulse the AUTOSET line using the same sequence as specified in the pushbutton instructions for that AUTOSET mode. The pulse must have a minimum duration of .75 seconds and is active low for XM/XMC-1 and -2 models and active high for XM/XMC-3 models. See Connections and Dimensions.

NOTE: AUTOSET automatically selects Output "ON" for mark. LT/DK line on XM/XMC-2 and -3 models will override automatic output selection.

(Mark Samples)



CONTRAST INDICATOR BAR 8

Remains on when signal Strength is above Bar 8

THRESHOLD POINT

Between Bars 4 & 5

CONTRAST INDICATOR BAR 1

Remains on when signal Strength is below Bar 1

CONTRAST INDICATORS (8X)

Green LED

Note: Insufficient contrast using Two-Point AUTOSET Mode is indicated by a triple-flash of all 8 contrast LEDs.

INVERT

Red LED
Illuminates when INVERT is enabled

TIMER INDICATOR

Green LED
Illuminates when 10ms pulse stretch Timer is enabled.

OUTPUT INDICATOR

Red LED
Illuminates when output is On
Flashes when output transistor is over current limit

INVERT/SELECT

1. When holding the AUTOSET button, tap to select the AUTOSET mode.
2. Push for two seconds to INVERT output
3. Manual Up adjustment; tap UP to "Tweak" setting

AUTOSET

1. Push and hold for AUTOSET, then release.
2. Manual Down adjust; tap DWN to "Tweak" setting

