


Connections:

- A) Supply voltage
- B) Case ground
- C) Common
- D) Output A
- E) Output NZ (if required)
- F) Output B (if required)

Note: output Z should always be an inverted index pulse.

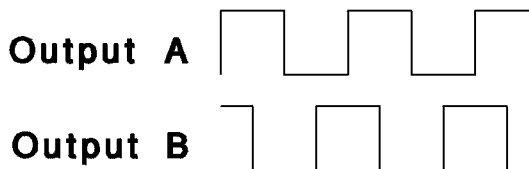

Output waveshape & phasing for clockwise rotation when viewed from shaft end farthest from the connector. (note: output B leads output A by 90°)

See the RJ datasheet for more information. See also the M76 option.

Rev	Description	Date	Tolerances	M125: RJ encoder with modified shaft and adapter (ECCI PU871, PU876)	
			.XXXX ± .0005	BY: TRD	MAT'L: 34A004 shaft, 33A060 adapter
			.XXX ± .005	DATE: 8/20/99	FINISH:
			.XX ± .01		SCALE: 1 : 1
			.X ± .015	PHOTOCRAFT, Inc. Elburn, Illinois	
			Fractions ± 1/32	8A125	
			Angles ± 15 min.		
			Runout ± .003		
			Unless otherwise specified		