
Encoder connector type: 97-3102A-14S-6P (6-pin)
Mating cable assembly: C6-6-10 CF M154 (10' cable)
Connections:

Pin	Function	Wire Color	
Α	Common	Black	
В	Supply voltage	Red	Circuit 1
D	Pulse Output	White	
F	Common	Blue	
E	Supply voltage	Brown	Circuit 2
С	Pulse Output	Green	

Example Model Number:

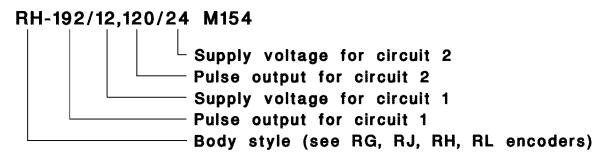

Notes:

- 1. The encoder is built with 2 independent circuits, each with its own code disk. There is no internal connection between the two circuits.
- 2. See also M129 option, and 46A017 cable

Rev	Description	Date	Tolerances	M154: 8	Special wiring for encode	er with
			.XXXX ± .0005	2 independent output circuits.		
			.XX ± .015	BY: TRD	MATL: N/a	
			Fractions ± 1/32	DATE: 3/12/03	FINISH: N/a	scale: n/a
			Runout ± .003	PHOTO	CRAFT, Inc. Elburn, Illinois	8A154